



SHENGXIN 圣鑫五金
HARDWARE

DRAWER SLIDE & HINGE




PRODUCTION PROCESS



Guangdong Shengxin Hardware company Located in China's hardware manufacturing area Jieyang, Guangdong Province. Shengxin Hardware was established in 1996. The company area of 12,000 square meters, there are 150 employees. After more than 20 years of tempering and experience precipitation. The company integrates design, production and sales of various hinges and drawer slides.

广东圣鑫五金有限公司位于揭阳五金制造业园区，圣鑫五金成立于1996年，公司占地面积12000平方米，现有员工150人。经过20多年的锻炼和沉淀，本公司集设计、生产、销售为一体的各种合页及抽屉滑轨。

Production Workshop

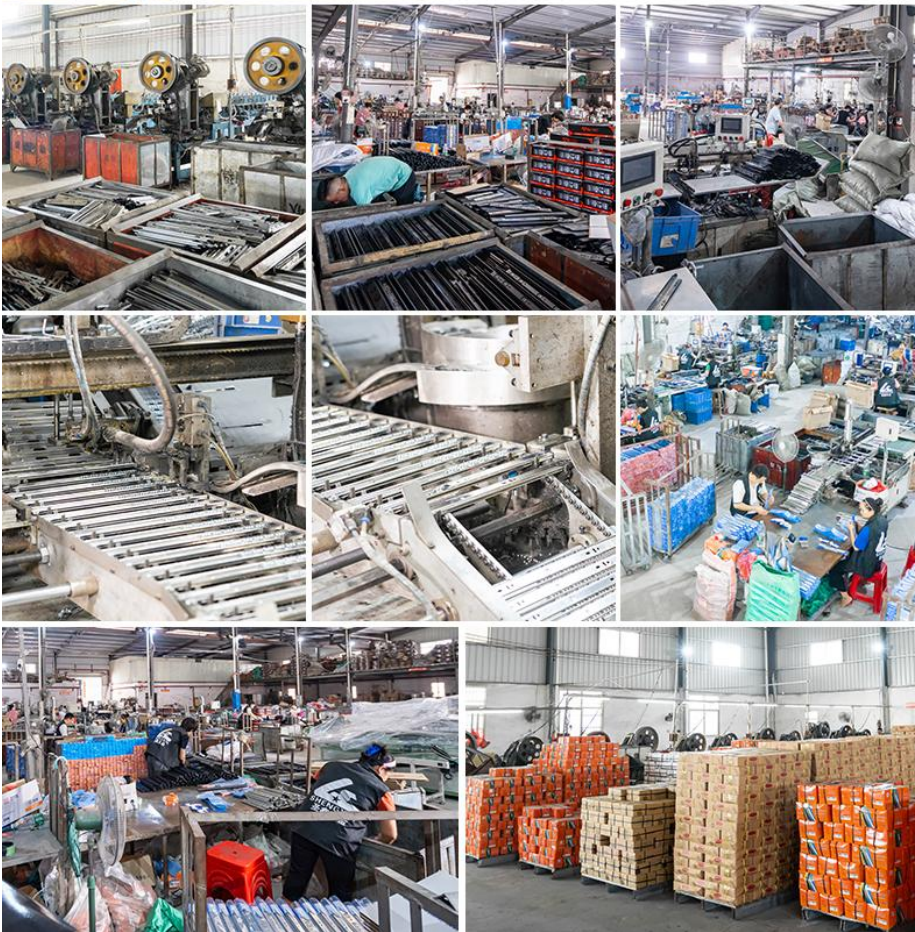

01

滑轨系列

DRAWER SLIDE SERIES



40mm

铁普通三节滑轨

Iron Ordinary 3-Fold Ball Bearing Drawer Slide



宽度
Width :40mm

长度
Width :250-600cm

重量
Weight :35g / 38g

颜色
Color :Zinc / Black

材料
Material :Cold-rolled

45mm

铁缓冲三节钢珠滑轨

Iron Soft closing 3-fold Ball Bearing Drawer Slide



宽度
Width :45mm

长度
Width :250-600cm

重量
Weight :48g/50g/54g/60g /72g

颜色
Color :Zinc / Black

材料
Material :Cold-rolled

45mm

铁普通三节滑轨

Iron Ordinary 3-Fold Ball Bearing Drawer Slide



宽度
Width :45mm

长度
Width :250-600cm

重量
Weight :48g/50g/54g/60g /72g

颜色
Color :Zinc / Black

材料
Material :Cold-rolled

45mm

铁反弹三节钢珠滑轨

Iron Push to open Drawer Slide



宽度
Width :45mm

长度
Width :250-600cm

重量
Weight :50g

颜色
Color :Zinc / Black

材料
Material :Cold-rolled

TWO COLORS OPTIONAL

Quiet buffer anti-pinch hand slide



Zinc color



Black color

45mm Nomal Slide

不锈钢普通三节滑轨

Stainless steel 3-Fold Ball Bearing Drawer Slide



宽度
Width :45mm

长度
Width :250-600cm

重量
Weight :48g/50g/54g/60g
/72g

颜色
Color :Zinc / Black

材料
Material :Stainless steel

45mm Soft closing Slide

不锈钢缓冲三节钢珠滑轨

Stainless steel Soft closing Drawer Slide



宽度
Width :45mm

长度
Width :250-600cm

重量
Weight :48g/50g/54g/60g
/72g

颜色
Color :Zinc / Black

材料
Material :Stainless steel

45mm Push to open Slide

不锈钢反弹三节钢珠滑轨

Stainless steel Push to open Drawer Slide



宽度
Width :45mm

长度
Width :250-600cm

重量
Weight :48g/50g/54g/60g
/72g

颜色
Color :Zinc / Black

材料
Material :Stainless steel

02

合页系列

HINGE SERIES



不锈钢液压铰链
Stainless steel
hydraulic hinge



SUS 304 全不锈钢液压铰链 自卸
All Stainless Steel Hydraulic Hinge Clip-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-22mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	高度精抛 Highly refined polished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	不锈钢 304/201 Stainless steel 304/201

SUS 304 全不锈钢液压铰链 固定
All Stainless Steel Hydraulic Hinge Slide-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-22mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	高度精抛 Highly refined polished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	不锈钢 304/201 Stainless steel 304/201

102g 杯不锈钢液压铰链 自卸
Cup Stainless Steel Hydraulic Hinge Clip-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:40mm	适用门板厚度 Door thickness	:25-30mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	高度精抛 Highly refined polished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	不锈钢 304/201 Stainless steel 304/201

3D 不锈钢液压铰链 自卸
Stainless Steel Hydraulic Hinge Clip-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-22mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	高度精抛 Highly refined polished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	不锈钢 304/201 Stainless steel 304/201

SX205 2.0mm厚不锈钢铰链 自卸
2.0mm Thick Stainless Steel Hydraulic Hinge Clip-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-22mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	高度精抛 Highly refined polished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	不锈钢 304/201 Stainless steel 304/201

SX206 2.0mm厚不锈钢铰链 固定 2.0mm Thick Stainless Steel Hydraulic Hinge Slide-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-22mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	高度精抛 Highly refined polished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	不锈钢 304/201 Stainless steel 304/201

SX207 新款不锈钢液压铰链小鸟合金自卸 New Stainless Steel Hydraulic Hinge Bird Alloy Clip-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-22mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	高度精抛 Highly refined polished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	不锈钢 304/201 Stainless steel 304/201

SX208 新款不锈钢液压铰链固定 New All Stainless Steel Hydraulic Hinge Slide-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-22mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	高度精抛 Highly refined polished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	不锈钢 304/201 Stainless steel 304/201

SX209 不锈钢液压铰链平扣合金 自卸 Stainless Steel Hydraulic Hinge With Alloy clip-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-22mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	高度精抛 Highly refined polished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	不锈钢 304/201 Stainless steel 304/201

SX210 不锈钢液压铰链小鸟 自卸 Stainless Steel Hydraulic Hinge Bird Clip-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-22mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	高度精抛 Highly refined polished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	不锈钢 304/201 Stainless steel 304/201

SX211 不锈钢液压铰链固定 Stainless Steel Hydraulic Hinge Slide on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-22mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	精抛 Highly polished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	不锈钢 201 Stainless steel 201

铁液压铰链
Iron hydraulic hinge

Reduce decibels

Silent hinge

Say goodbye to the noise era



Not easy to rust



Enjoy silently



Cold rolled steel



Precision parts



SX431 40mm 铁液压铰链合金自卸
40mm Cup Iron Hydraulic Hinge Alloy Cilp-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:40mm	适用门板厚度 Door thickness	:25-30mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	双层镍镀 Double Nickel finished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	铁 Iron

SX432 40mm 铁液压铰链固定
40mm Cup Iron Hydraulic Hinge Side-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:40mm	适用门板厚度 Door thickness	:25-30mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	双层镍镀 Double Nickel finished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	铁 Iron

SX433 新款液压铰链 小鸟合金 自卸
Stainless Steel Hyaraulc Hinge With Aloy clip-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-22mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	双层镍镀 Double Nickel finished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	铁 Iron

SX434 新款 铁 液压铰链 固定
New Iron Hydraulic Hinge Side-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-22mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	双层镍镀 Double Nickel finished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	铁 Iron

3D63 铁3D液压铰链
Iron 3D Hydraulic Hinge Clip-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-22mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	双层镍镀 Double Nickel finished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	铁 Iron

SX561 铁液压铰链平扣合金自卸
Iron Hydraulic Hinge With Alloy Clip-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-21mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	镀锌 Nickel finished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	铁 Iron

SX562 铁液压铰链配欧式螺丝
Hydraulic Hinge With European Screw



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-22mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	镀锌 Nickel finished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	铁 Iron

SX563 铁液压铰链固定
Iron Hydraulic Hinge Slide-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-21mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	镀锌 Nickel finished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	铁 Iron

SX564 开尾液压铰链固定
Open-tall Hydraulic Hinge Slide-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-20mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	镀锌 Nickel finished
铰杯深度 Cup depth	:10.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	铁 Iron

SX565 经济铁液压铰链固定
Economic iron Hydraulic Hinge Slide-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-16mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	镀锌 Nickel finished
铰杯深度 Cup depth	:9.5mm	开启角度 Opening angle	:93-100°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	铁 Iron



普通铰链
Ordinary Hinge



SX681 普通一段力&两段力铰链
Ordinary One way & Two way Hinge



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-18mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	镀镍 Nickel finished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	铁 Iron

SX682 铁普通铰链欧螺
Common Iron Hinge With Euro Screw



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-18mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	镀镍 Nickel finished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	铁 Iron

SX683 铁普通铰链自卸
self-unloading of ordinary iron Hinge Clip-on



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-21mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	镀镍 Nickel finished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	铁 Iron

SX684 三钉一段力铰链2孔4孔
Three Nails, One Way Hinge, Two Holes And Four Holes



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:35mm	适用门板厚度 Door thickness	:14-18mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	镀镍 Nickel finished
铰杯深度 Cup depth	:11.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	不锈钢 304/201 Stainless steel 304/201

3D685 26杯迷你一段力铰链
26mm One Way Hinge



技术参数 Technical Parameter

铰杯直径 Diameter of hinge cup	:26mm	适用门板厚度 Door thickness	:14-18mm	门板钻孔边距 Door drilling margin	:3-5mm	表面处理 Finish	镀镍 Nickel finished
铰杯深度 Cup depth	:10.5mm	开启角度 Opening angle	:95-105°	侧板钻孔 Side plate drilling	:37mm	主要材质 Main material	铁 Iron

其他铰链
Other Hinge

165° 165°铰链
165° Hinge



165° Normal



165° Hydraulic-Slide-on



165° Hydraulic-Clip-on

短臂铰链
Short Arm Hinge



青蛙铰链(小 - 中 - 大)
Frog Hinges (Small-Medium-Large)



3Inch



4Inch



Hydraulic

30°45°90°135° 不同度数铰链
Hinges Of Different Degrees



30°



45°



90°



135°

SX668 带垫片液压铰链
Hydraulic Hinges With Gaskets



C=0



C=8



C=15

平开合页
Flat Hinge

Product name: Flat hinge


Product size:4 inch/5 inch

Main material:Iron


Weight: 255g/1 piece

Product color: as shown Page

Thickness: 3mm

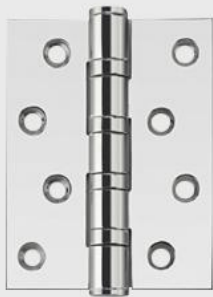

True color

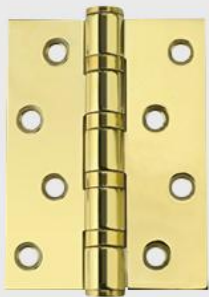

Gold



Black



Green Bronze



Red Bronze



Yellow Bronze

Thickened base
Strong magnetic attraction

Thickened material, thick and full, stable and durable
Strong suction, not easy to demagnetize



子母合页
Flat Hinge

Product name	Mother-child hinge
Hinge material	Stainless steel
Product Size	4 inch/5inch
product weight	180g/piece
Color of the product	Multi-color optional
Scope of application	Various solid wood doors, composite doors, interior doors, bathroom doors



True color



Bronze gold



Black



Bronze green



Bronze red



Gold

Meticulous workmanship
Cast with heart




Full thickness

Super thickened hinges
more load-bearing
and longer service life



Solid bearing

smooth and smooth
Axial tight clearance

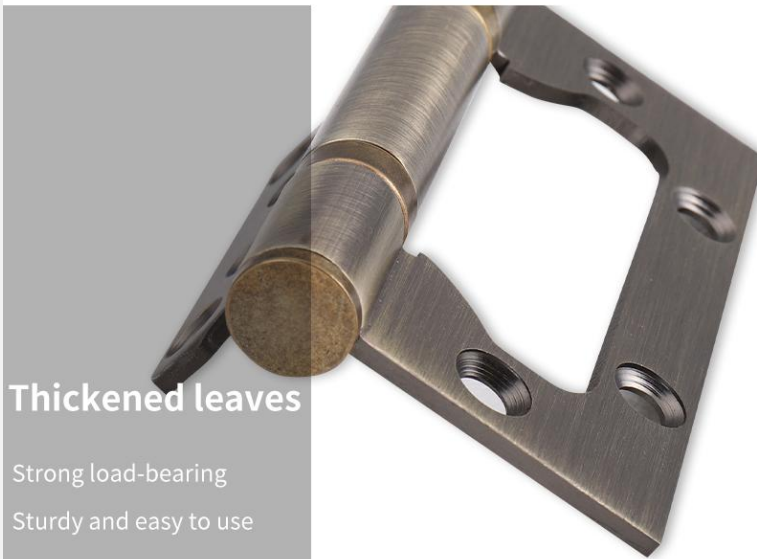

Thickened leaves

Strong load-bearing
Sturdy and easy to use

Drawing process

beautiful and layered
Not easy to rust

