

AG015 | ANGLE GRINDER




Rated Voltage:	220-240V~50/60Hz	Colour box packing	
Input power:	1550W	Outer carton size:	65x43.5x26cm
No load speed:	9000r/min	Qty:	10pcs
Disc Dia:	Ø115/125/150mm	G.W. / N.W.:	29/27kgs
Spindle thread:	M14		



AG015-A | ANGLE GRINDER



Rated Voltage:	220-240V~50/60Hz	Colour box packing	
Input power:	1550W	Outer carton size:	65x43.5x26cm
No load speed:	1000-10800r/min	Qty:	10pcs
Disc Dia:	Ø115/125/150mm	G.W. / N.W.:	29/27kgs
Spindle thread:	M14		

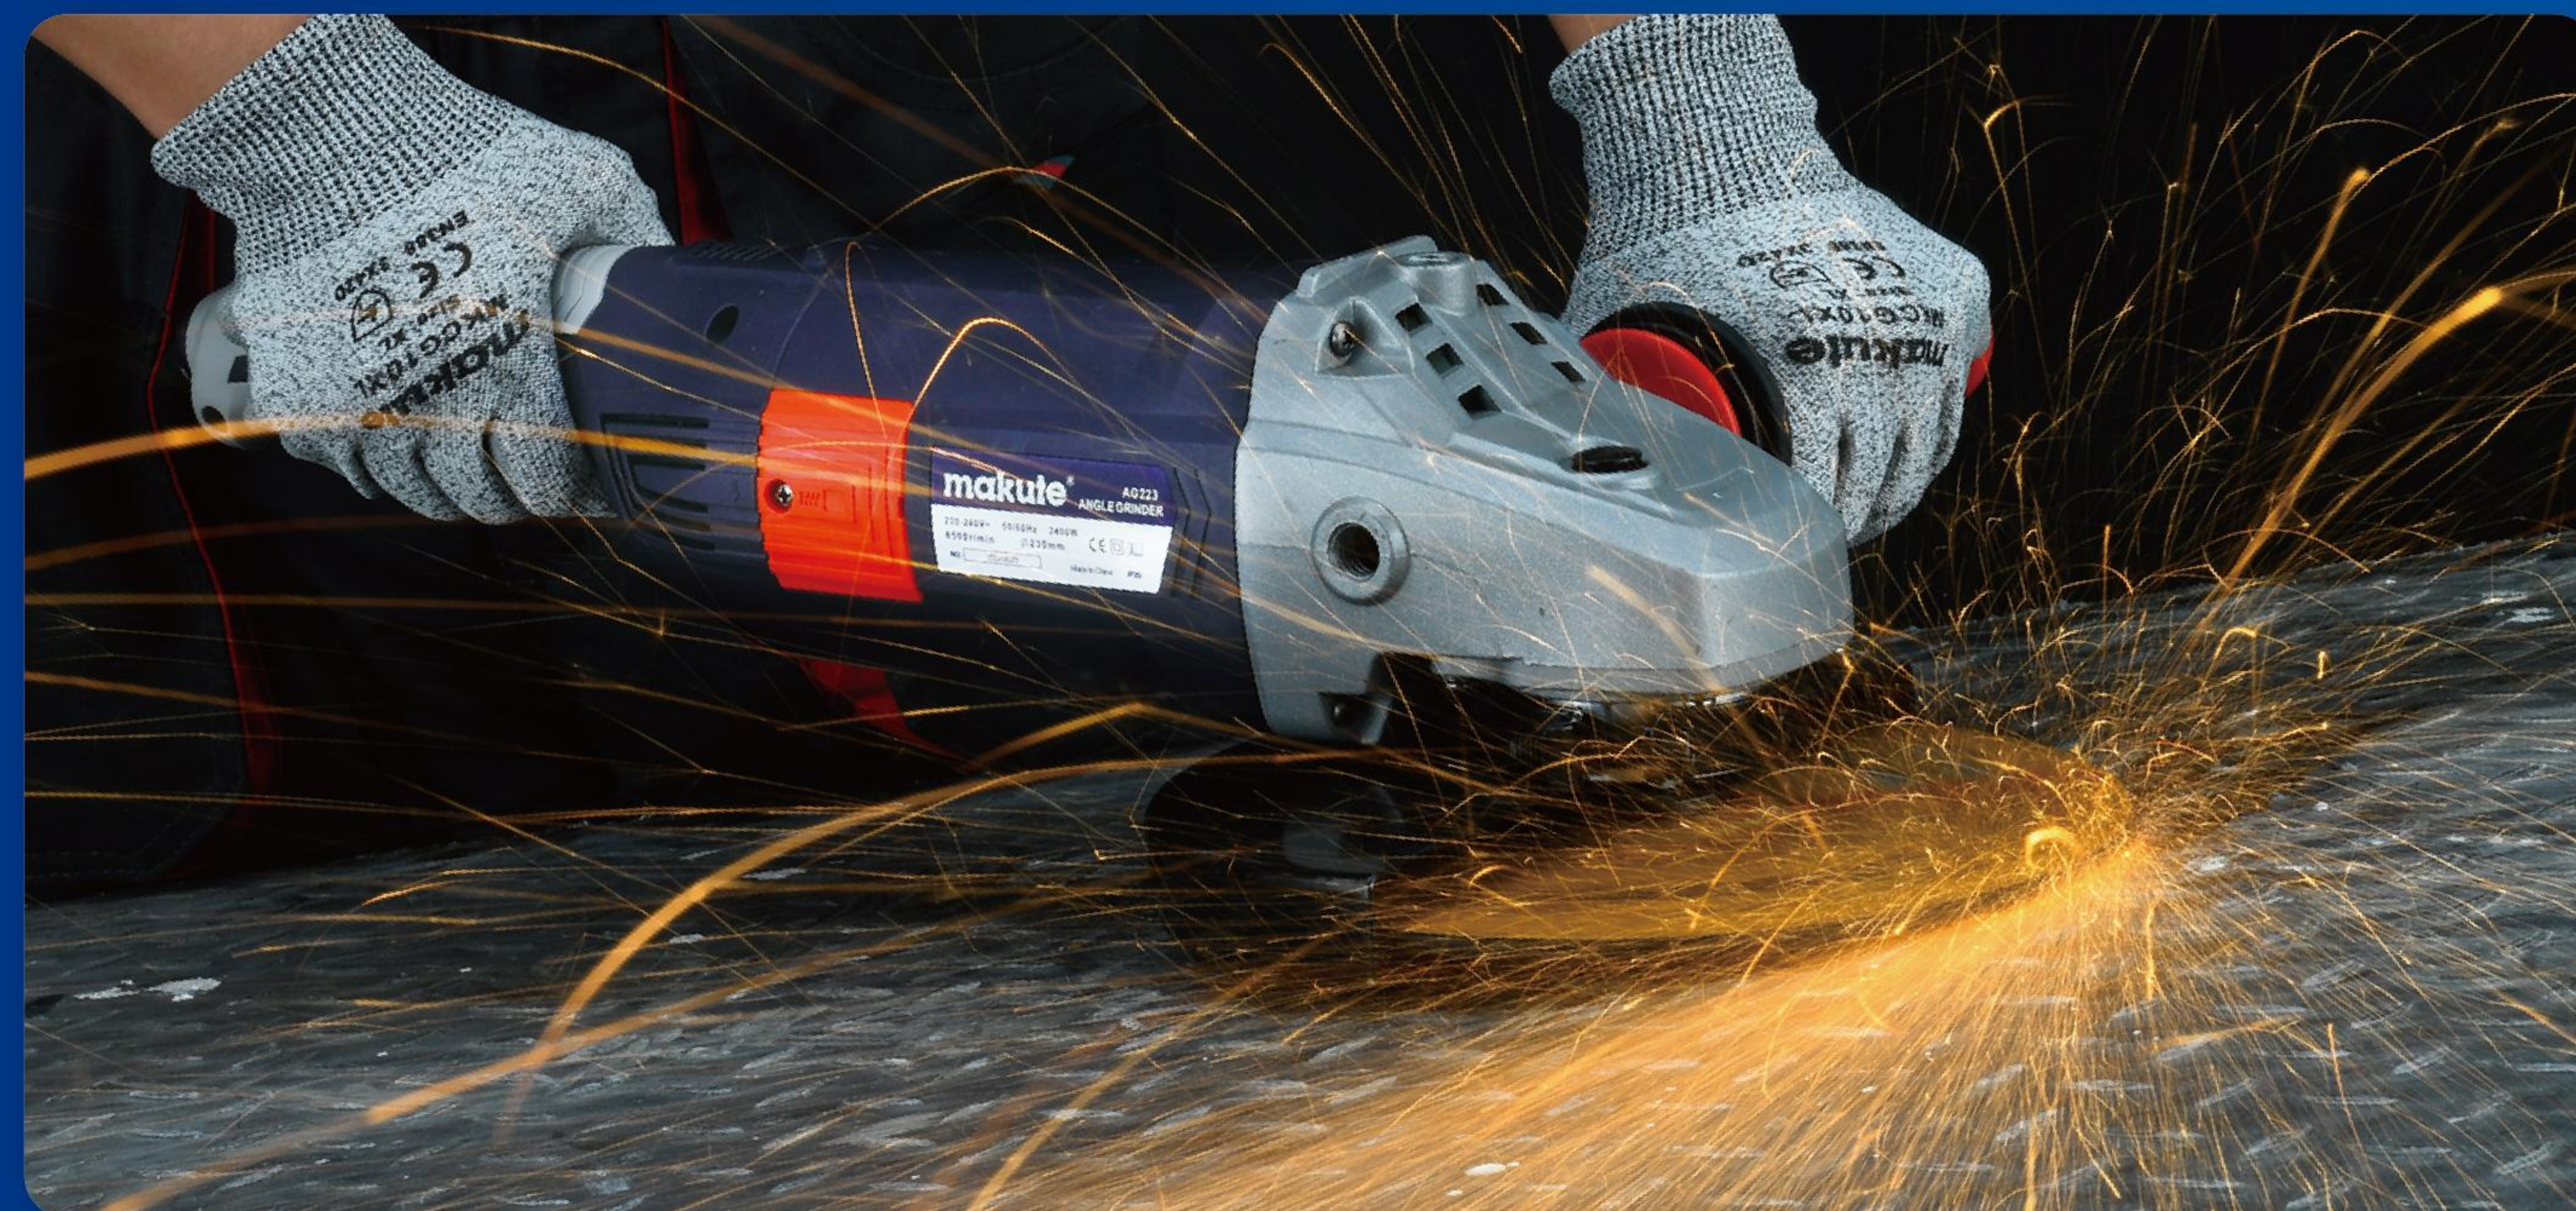

AG215 | ANGLE GRINDER

- Unique motor design for strong performance
- 2-positions soft touch side handle
- Dustproof design
- Multifunction make working high efficiency
- Shaft lock for easy wheel change

Rated Voltage:	220-240V~50/60Hz	Colour box packing	
Input power:	1500W	Outer carton size:	65x43.5x26cm
No load speed:	3000-10000r/min	Qty:	10pcs
Disc Dia:	Ø115/125/150mm	G.W. / N.W.:	29/27kgs
Spindle thread:	M14		



AG018 | ANGLE GRINDER



Rated Voltage:	220-240V~50/60Hz	Colour box packing	
Input power:	1680W	Outer carton size:	48x30x30cm
No load speed:	8500r/min	Qty:	4pcs
Disc Dia:	Ø180mm	G.W. / N.W.:	17/15kgs
Spindle thread:	M14		



- Unique motor design for strong performance
- 2-positions side handle
- Dustproof design
- Multifunction make working high efficiency
- Shaft lock for easy wheel change

AG018-A | ANGLE GRINDER



Rated Voltage:	220-240V~50/60Hz	Colour box packing	
Input power:	1750W	Outer carton size:	48x30x30cm
No load speed:	8500r/min	Qty:	4pcs
Disc Dia:	Ø180mm	G.W. / N.W.:	17/15kgs
Spindle thread:	M14		



- Unique motor design for strong performance
- 2-positions side handle
- Dustproof design
- Multifunction make working high efficiency
- Shaft lock for easy wheel change

AG218 | ANGLE GRINDER



Rated Voltage:	220-240V~50/60Hz	Colour box packing	
Input power:	1800W	Outer carton size:	47.5x23x30cm
No load speed:	1000-8000 r/min	Qty:	4pcs
Disc Dia:	Ø180mm	G.W. / N.W.:	17.5/15.5kgs
Spindle thread:	M14		



- Unique motor design for strong performance
- 2-positions soft touch side handle
- Dustproof design
- Multifunction make working high efficiency
- Shaft lock for easy wheel change

AG223 | ANGLE GRINDER



Rated Voltage:	220-240V~50/60Hz	Colour box packing	
Input power:	2400W	Outer carton size:	59x40.5x26.5cm
No load speed:	6500 r/min	Qty:	4pcs
Disc Dia:	Ø230mm	G.W. / N.W.:	25/23kgs
Spindle thread:	M14		



- Unique motor design for strong performance
- 2-positions soft touch side handle
- Dustproof design
- Multifunction make working high efficiency
- Shaft lock for easy wheel change

CLL121-5 LASER LEVEL

Specifications:	8V8H	Automatic Leveling Range:	± 4°
Wavelength:	510nm laser diode,floor point 650nm	Projection Angle:	360°
Light Source:	ClassII/ClassIIIA,High power	Working Range:	Indoor 10m;Outdoor 30-50m
Horizontal and Vertical Accuracy:	3m/±1mm	Power Supply:	DC4.5(AA1.5Vx3)
Right Angle Precision:	90°±0.02° (±1mm/3m)	Working Hours:	3H
Down to Point Accuracy:	±1mm/7m	Fixed Screw Connector:	5/8"x11,ISO Standard
Orthogonal Accuracy:	±1mm/7m	Working Temperature:	-10℃ ~ 50℃
Line Width:	4mm/10m		

PVC Box Packing	
Out Carton Size:	49.5x42x46.5cm
Qty:	12PCS
N.W./G.W.:	19 / 20kgs

**CLL121-12** **LASER LEVEL**

Specifications:	8V8H	Automatic Leveling Range:	± 4°
Wavelength:	510nm laser diode,floor point 650nm	Projection Angle:	360°
Light Source:	ClassI/ClassIIA,High power	Working Range:	Indoor 10m;Outdoor 30-50m
Horizontal and Vertical Accuracy:	5m/±1mm	Power Supply:	DC4.5(AA1.5Vx3)
Right Angle Precilion:	90°±0.02° (±1mm/3m)	Working Hours:	4H
Down to Point Accuracy:	±1mm/7m	Fixed Screw Connector:	5/8"x11,ISO Standard
Orthogonal Accuracy:	±1mm/7m	Working Temperature:	-10℃～50℃
Line Width:	4mm/10m		
<hr/>			
PVC Box Packing			
Out Carton Size:	57x40x47cm		
Qty:	12PCS		
N.W./G.W.:	22 / 23kgs		

**CLL131-16** **LASER LEVEL**

Specifications:	8V8H	Automatic Leveling Range:	3 ± 1°
Wavelength:	515nm laser diode, floor point 635nm	Projection Angle:	110°
Light Source:	ClassII/ClassIIIA, High power	Working Range:	Indoor 10m; Outdoor 30-50m
Horizontal and Vertical Accuracy:	7m/ ±1mm	Power Supply:	DC4.5(AA1.5Vx3)
Right Angle Precision:	90° ± 0.02° (±1mm/5m)	Working Hours:	7-8H
Down to Point Accuracy:	±1mm/5m	Fixed Screw Connector:	5/8"x11, ISO Standard
Orthogonal Accuracy:	±1mm/5m	Working Temperature:	-10℃ ~ 50℃
Line Width:	2mm/7m		

PVC Box Packing	
Out Carton Size:	65.3x35x59.6cm
Qty:	8PCS
N.W./G.W.:	23.5 / 25kgs



P2-DC02-2B **CAG126+CW002**

Cordless Angle Grinder Cordless Wrench

Package Model:	CW002+CAG126
Accessory part:	2 battery(5420-40C) & 1 standard charger
PVC box packing	
Out carton size:	54x47.5x35.3cm
Qty:	4PCS
N.W. / G.W.:	23.7 / 25.7kgs



P2-DC03-2B **CW001+CD200**

Cordless Wrench

Cordless Drill

Package Model:	CW001+CD200
Accessory part:	2 battery(5420-30A) & 1 standard charger
PVC box packing	
Out carton size:	51x44x31.5cm
Qty:	4PCS
N.W. / G.W.:	18.7 / 20.7kgs



P3-DC03-2B **CAG126+CHD121-26+CID121-10**

Cordless Angle Grider
Cordless Hammer Drill
Cordless Impact Drill

Package Model:	CAG126+CHD121-26+CID121-10
Accessory part:	2 battery(5420-40C) & 1 standard charger
PVC box packing	
Out carton size:	57.5x34.4x39.7cm
Qty:	2PCS
N.W. / G.W.:	18.2 / 20.2kgs



VC121-30S **VACUUM CLEANER**

- With a special attachment fixed slot
- Cable storage with hook
- Drainage holes
- With casters, more stable, more convenient operation

Rated Voltage:	220-240V~50/60Hz		
Input Power:	1200W	Colour Box Packing	
Capacity:	30L	Carton Size:	35.5×35.5×58cm
Vacuum Degree:	≥16Kpa		1PC
Air Flow:	28L/S	N.W./G.W.:	7.5 / 8.5kgs



VC121-60 **VACUUM CLEANER**

- With a special attachment fixed slot
- Cable storage with hook
- Drainage holes
- With casters, more stable, more convenient operation
- Waterproof design of the whole machine

Rated Voltage:	220-240V~50/60Hz		
Input Power:	2400W	Colour Box Packing	
Capacity:	60L/S	Carton Size:	55 × 46 × 83cm
Vacuum Degree:	≥ 19Kpa	Qty:	1PC
Air Flow:	35L/S	N.W./G.W.:	18 / 20kgs



VC121-60S **VACUUM CLEANER**

- With a special attachment fixed slot
- Cable storage with hook
- Drainage holes
- With casters, more stable, more convenient operation
- Waterproof design of the whole machine

Rated Voltage:	220-240V~50/60Hz		
Input Power:	2400W	Colour Box Packing	
Capacity:	60L	Carton Size:	55 × 46 × 83cm
Vacuum Degree:	≥ 19Kpa	Qty:	1PC
Air Flow:	35L/S	N.W./G.W.:	18 / 20kgs



VC131-80 **VACUUM CLEANER**

- With a special attachment fixed slot
- Cable storage with hook
- Convenient water outlet
- With casters, more stable, more convenient operation
- There are three motors with greater suction
- Waterproof design of the whole machine
- Three gear control, adjustable suction

Rated Voltage:	220-240V~50/60Hz		
Input Power:	3000W	Color Box Packing	
Capacity:	80L	Outer Carton Size:	60×50.5×91cm
Vacuum Degree:	≥19Kpa	Qty:	1PC
Air Flow:	35L/S	N.W./G.W.:	26 / 28kgs



TC800-3 **TILE CUTTER**



		Color Box Packing
Max Cutting Width:	800mm	Outer Carton Size: 100×19×14cm
Min Cutting Width:	20mm	Qty: 1PC
Tile Thickness Range:	5-15mm	N.W./G.W.: 10 / 11kgs



TC1000-3 **TILE CUTTER**



		Color Box Packing	
Max Cutting Width:	1000mm	Outer Carton Size:	120×19×14cm
Min Cutting Width:	20mm	Qty:	1PC
Tile Thickness Range:	5-15mm	N.W./G.W.:	12 / 13kgs



TC111-600 **TILE CUTTER**



		Color Box Packing	
Max Cutting Width:	600mm	Outer Carton Size:	83×25.5×22.5cm
Min Cutting Width:	80mm	Qty:	2PCS
Tile Thickness Range:	6-12mm	N.W./G.W.:	13.5 / 14.2kgs

